
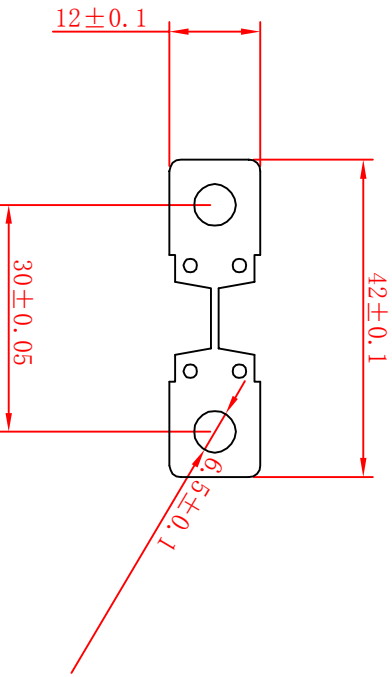


DRAWING REVISIONS			
REV	S/N	DESCRIPTION	APPROVED
A	20091210-011	ORIGINAL RELEASE	

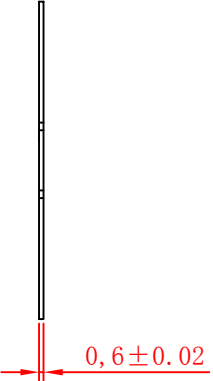

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles. This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.
- A fuse is a device designed to interrupt the electrical circuit when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected.
- Functional Characteristics

TESTING CURRENT

- 100%
- 110%
- 150%
- 200%
- 300%

BLOW TIME LIMIT

- 100Hr. minimum
- 4Hr. minimum
- 90seconds-3600seconds
- 5seconds -100seconds
- 0.5sec-15sec

4. Standard: ISO8820-5; UL248;

DONGGUAN TIANRUI ELECTRONIC CO.,LTD.		ANS bolt-on Fuse		CUST
UNLESS OTHERWISE STATED				
WALL THICKNESS		MM		
LINEAR	.XX	±0.15	MM	
ANGULAR	.XXX	±0.05	MM	
DRAFT ANGLE/SIDE		±0.5	DEG	
BURR & FLASH		0.10	MAX	
BREAK CORNERS		0.20	R. MAX	
PARTIAL LINE RESURFACE		0.05	MAX	
PART NO.		APPD		ANS

1 2 3 4 5 6 7 8